

## Lens Datasheet

Model No: OPLLC0067

LED Source: XP-E2


LED Manufacturer: CREE

Optics & Allied Engg.Pvt. Ltd.

No. 9Q, 1st Phase, Jigani Link Road,  
Bommasandra Industrial Area,

Bangalore, INDIA

Tel: (+91) 80-4904-4904

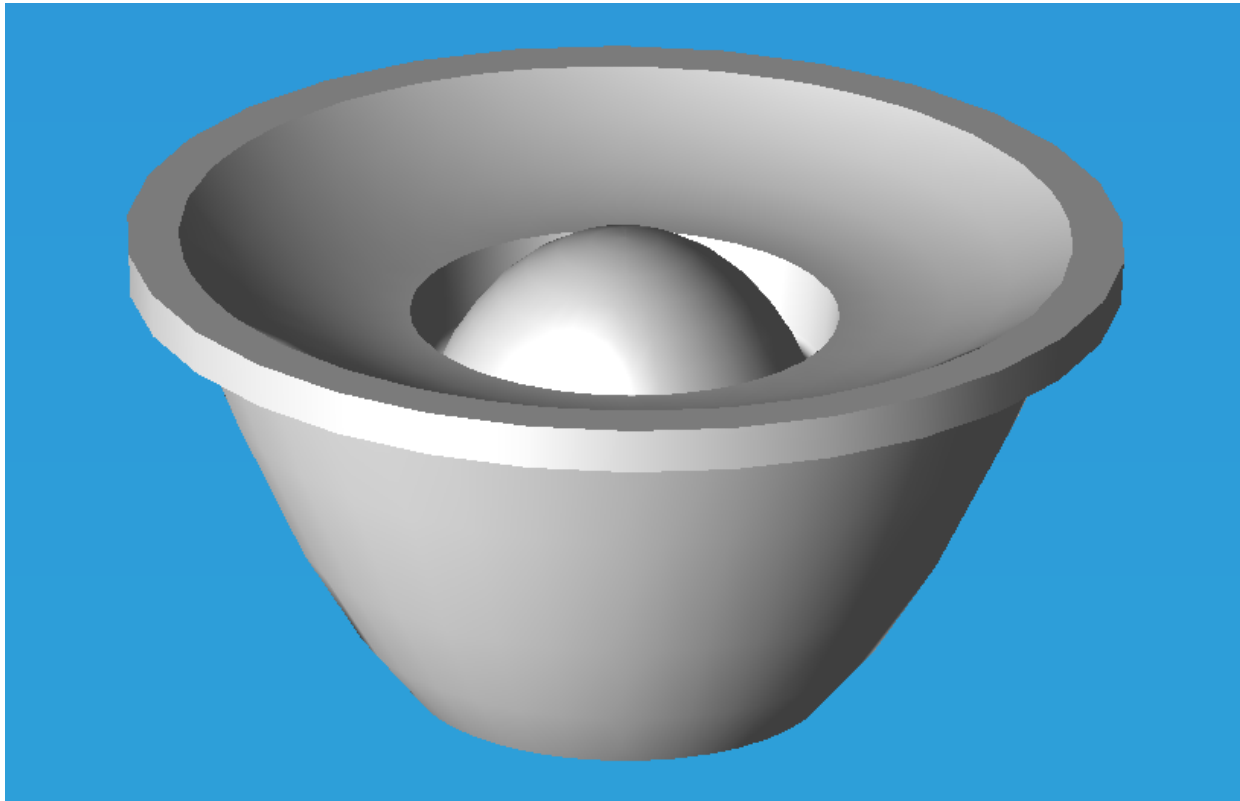

### Features:

- High Efficiency
- Narrow beam output
- Easy to mount

### Lens Details:

S.No.	Parameter	Specification
1.	Lens Material	PMMA
2.	Lens Dimensions	Ø 32.65mm & Height 15.65mm
3.	Operating Temperature ( $T_{opr}$ )	-40 to +80°C



# Lens Datasheet


Model No: OPLLC0067

LED Source details:

S.No.	Parameter	Specification
1.	LED Source	XP-E2
2.	LED Manufacturer	CREE
3.	LED Operating Current	350 mA
4.	Forward Voltage	2.9 V
5.	LED output flux	Normalized to 1 lm
6.	LED viewing angle	110°
7.	Detector distance	2.5 Meter
8.	Simulation Tool	TracePro


Note: Simulation carried out by coupling OPLLC0067 lens with CREE XP-E2 LED

## Polar Intensity Distribution

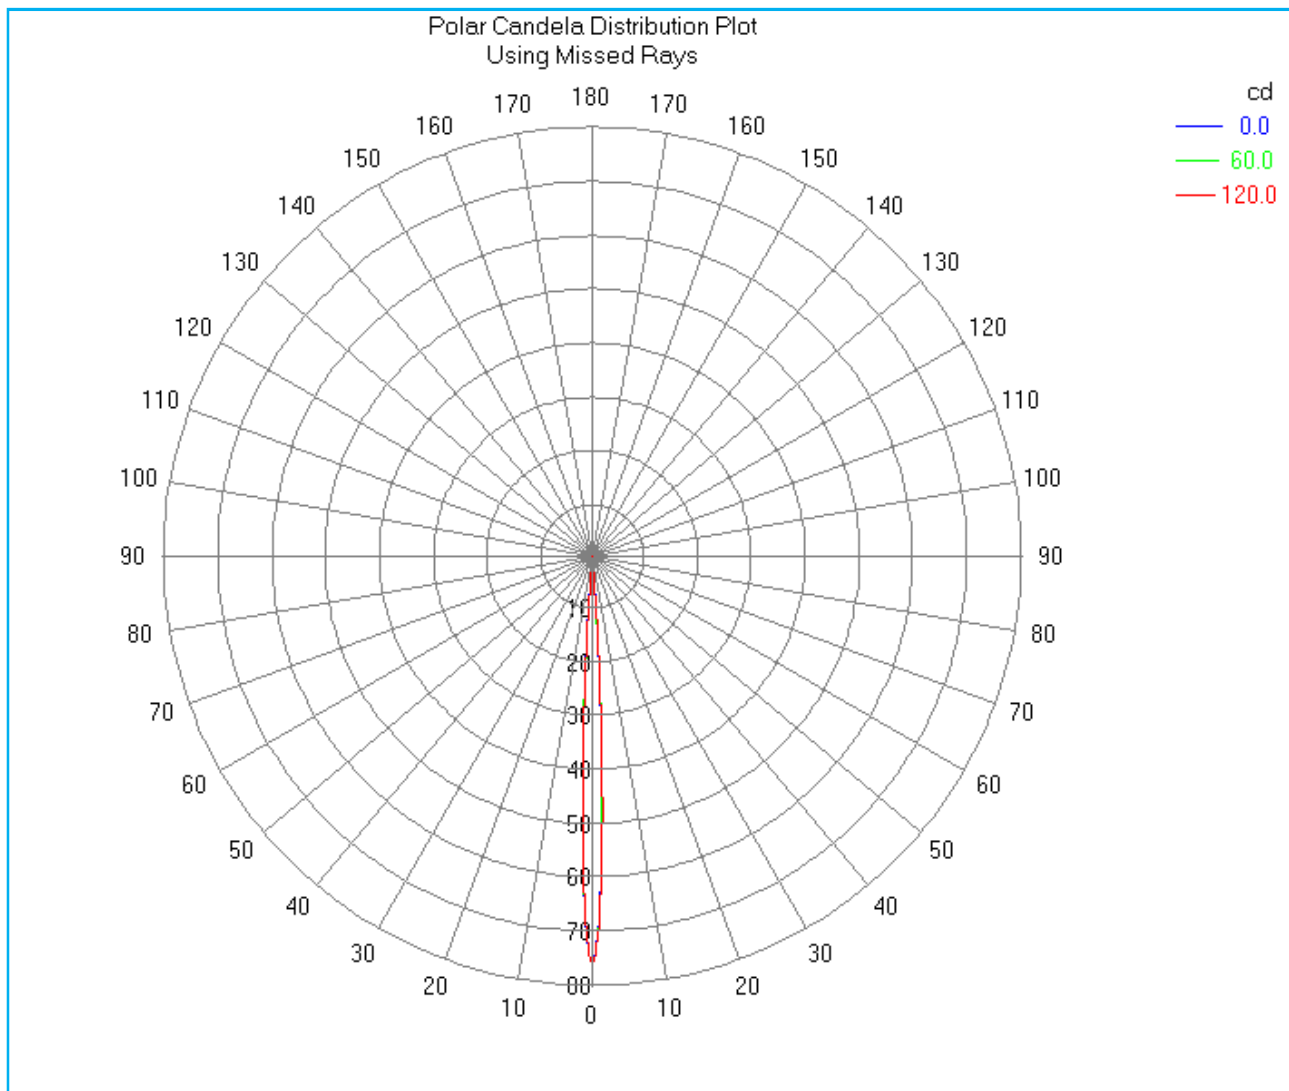

Lens Datasheet  
 Model No: OPLLC0067

### Rectangular Intensity Distribution

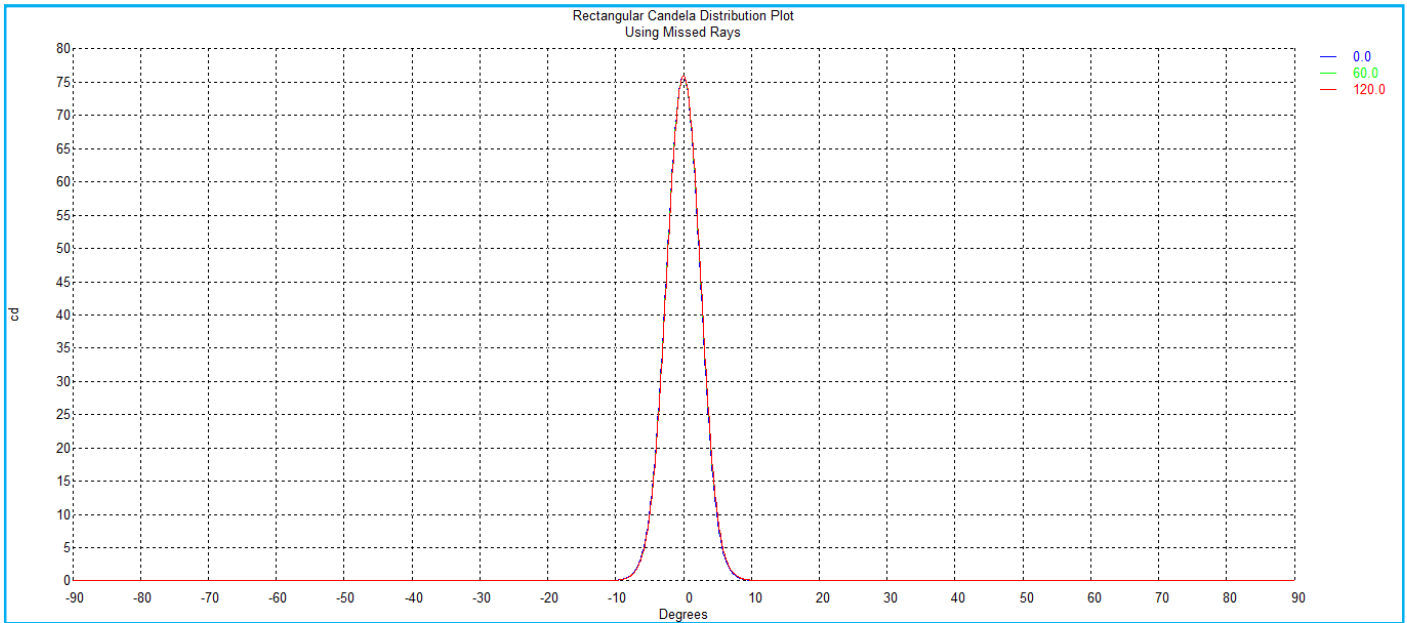


FWHM Angle of the beam is 5.5°  
 FWTM Angle of the beam is 9.8°

Note:

FWHM Angle - Full width half maximum (Beam angle at 50% of the maximum Intensity)

FWTM Angle - Full width tenth maximum (Beam angle at 10% of the maximum Intensity)

### Rectangular Iso-Candela Plot

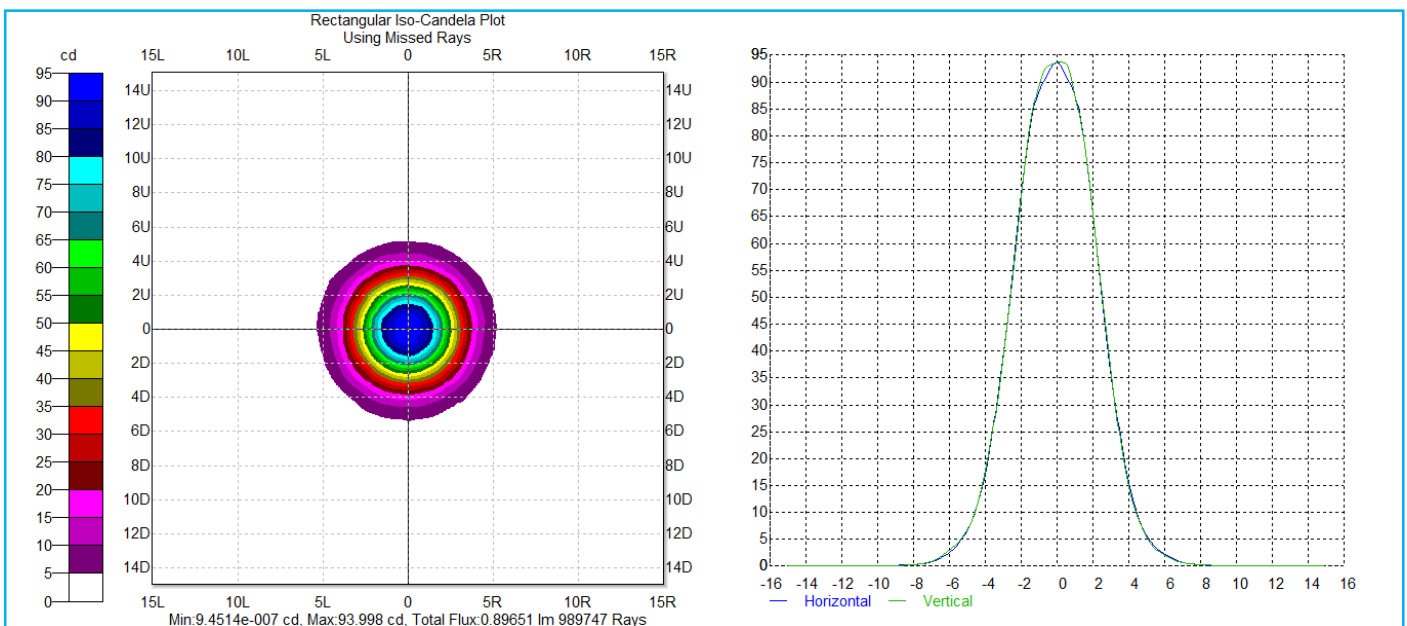

Rectangular Iso-candela plot of the lens with normalized input flux of 1 Lumen


Output flux is 0.8965 Lumen

# Lens Datasheet

Model No: OPLLC0067

## Lens Characteristics

S.No.	Parameter	Value	Units
1.	FWHM Angle of the beam	5.5	Degrees
2.	FWTM Angle of the beam	9.8	Degrees
3.	Efficiency of the lens	89.6	%
4.	Candela per lumen	93.99	Cd/lm

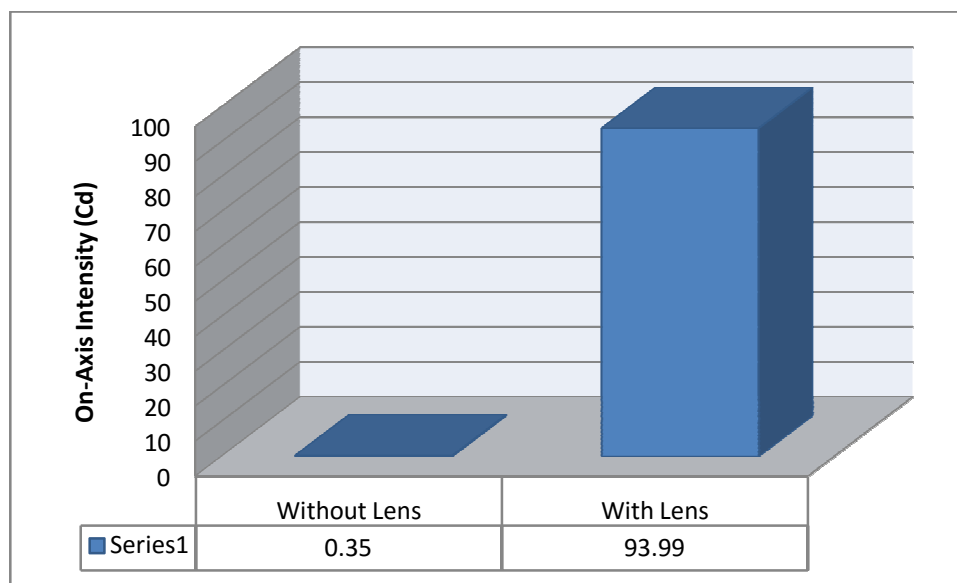

Comparison of On-Axis Intensity of the LED with normalized emitted flux 1 Lumen with and without Optica OPLLC0067 Lens

### Note:

- Don't handle the lens without wearing the gloves, finger prints may reduce the lens efficiency
- Any flow lines on the external surface of the lens are acceptable if the optical characteristics are not affected